

## Cable Tie Adhesive Mounts

Selection Guide



# Adhesive Mounts

Adhesive mounts provide a unique solution for critical routing applications – an anchoring point that can be placed virtually anywhere, without requiring holes or drilling.


Use this guide to choose the right adhesive mount for your application based on criteria such as mounting surface, bundle weight and environmental factors. Installers can also learn about proper installation. Many adhesive mount failures can be attributed to not applying enough pressure when adhering to a surface and not allowing enough dwell time.

We offer four adhesive options, so choosing the right one is essential for maximum results. For example, rubber is an appropriate and economical choice for indoor applications where the environment is controlled, such as control panels and industrial automation. Acrylic-based adhesives perform better in environments where the mount may be exposed to chemicals and higher temperatures, which are common in the auto, truck, heavy equipment and machine building industries. Acrylics also have better UV resistance and good water resistance for outdoor applications.

HellermannTyton offers adhesive mounts in a variety of configurations to match common cable tie sizes and a range of applications. Our mounts feature quality 3M™ adhesives, providing impressive strength and longevity.

## Common applications:

- Control panels
- Indoor or outdoor cable routing
- Constrained spaces requiring a low-profile fastening solution
- Surfaces that cannot be drilled
- Routing wires away from moving parts





### Selecting Adhesive Mounts for Your Application

Adhesives have characteristics that can affect performance. To select the optimum part for the application, follow these three steps.

#### STEP 1: Surface Energy

Surface energy refers to how well the application surface can be bonded to. See the examples below to determine whether your surface is high energy or low energy. High surface energy substrates have a higher molecular bond, allowing the adhesive to spread across the surface more easily. Low surface energy demonstrates weaker molecular bonds.

*Refer to the chart on page 5 to determine the best adhesive mount based on surface energy.*

| Examples of High Surface Energy (HSE) Materials           | Examples of Low Surface Energy (LSE) Materials   | Demonstration of Adhesive Reaction on HSE Surfaces                                  | Demonstration of Adhesive Reaction on LSE Surfaces                                   |
|---|--|---|--|
| Aluminum<br>Stainless Steel<br>Anodized Aluminum<br>Glass | ABS<br>Acetal<br>Acrylic<br>Epoxy Paint<br>Nylon |  |  |

#### STEP 2: End-Use Environment

The environment where the adhesive mount is applied may be different than the end-use environment. Take into account the many factors that may affect performance where the product will be used, including:

- Chemicals
- Operating temperatures
- UV resistance

*Refer to the chart on page 5 for determining the best adhesive mount based on end-use factors.*

cont.

### Selecting Adhesive Mounts for Your Application *(cont.)*

#### STEP 3: Bundle Weight

The load being applied to the adhesive will affect overall performance. The industry standard practice is to list a pull-off force on the product package. However, this doesn't take into account static load over time.

Find the static load rating (below) for the mount you are using and enter into the formula to determine the number of mounts needed for your application.

| Type            | Static Load Rating<br>lb/mt |
|-----------------|-----------------------------|
| MB2.5A          | 0.3                         |
| MB3A            | 0.6                         |
| MB4A, FMB4APT-1 | 1.1                         |
| MB5A, WSMB5AHB  | 2.1                         |

#### Calculation:

$$\frac{\text{Cable weight (lb/ft)}}{\text{Load Rating (lb/mt)}} = \frac{\text{Adhesive Mount Spacing}}{\text{ft}}$$

#### Example:

Adhesive mounts are needed for an industrial control panel. The panel has an enamel powder-coated finish and will be installed indoors. The control panel will not be exposed to chemicals, moisture or hazardous conditions. The cables being installed will weigh about 0.31 lb per foot.


**STEP 1:** Enamel has a low surface energy, so we suggest the installer use an acrylic adhesive. If the panel were bare steel or aluminum, we would recommend a rubber adhesive.

**STEP 2:** The mounts will be used in a controlled end-use environment with no risk of chemical exposure.

**STEP 3:** Cable weight =  $\frac{0.31 \text{ lb/ft}}{\text{MB4A Load Rating: } 1.1} = \frac{0.28}{\text{Adhesive Mounts}} \text{ ft}$  *We suggest 1 high-bond acrylic mount per foot.*

#### Note:

For optimal performance of applications that require the wires to hold at angles, do not exceed spacing between each mount greater than 1 ft.

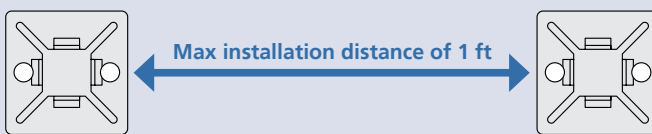

HellermannTyton recommends testing products in the intended applications before final usage to verify proper functionality.

### Adhesive Mount Selection Guide

| Page                              | Product   | STEP 1                        |                              | STEP 2                       |               |                      |                     |            |            |                  |
|-----------------------------------|---|-------------------------------|------------------------------|------------------------------|---------------|----------------------|---------------------|------------|------------|------------------|
|                                   |   | High Surface Energy Substrate | Low Surface Energy Substrate | Operating Temperatures       | UV Resistance | Water, 5% Salt water | Motor Oil and Fuels | Weak Acids | Weak Bases | Organic Solvents |
| High-Heat Acrylic Adhesive Mounts |   |                               |                              |                              |               |                      |                     |            |            |                  |
| 6                                 |    | +                             | +                            | -40 to 176F<br>(-40 to 80C)  | +             | +                    | +                   | +          | +          | +                |
| High-Bond Acrylic Adhesive Mounts |   |                               |                              |                              |               |                      |                     |            |            |                  |
| 7                                 |    | +                             | +                            | -31 to 158F<br>(-35C to 70C) | +             | +                    | +                   | +          | +          | +                |
| Acrylic Adhesive Mounts           |   |                               |                              |                              |               |                      |                     |            |            |                  |
| 8                                 |  | +                             | +                            | -31 to 158F<br>(-35C to 70C) | +             | +                    | +                   | +          | +          | +                |
| Rubber Adhesive Mounts            |   |                               |                              |                              |               |                      |                     |            |            |                  |
| 9                                 |  | +                             | +                            | 0 to 150F<br>(-18 to 66C)    | +             | +                    | +                   | -          | +          | -                |

+ Good   
 + Fair   
 - Not Recommended

# Bundling and Securing

## Cable Tie Mounts

### Adhesive Mounting Bases

#### High-Heat Acrylic Adhesive Mounts


HellermannTyton Adhesive Cable Tie Mounting Bases are used with T18 through T150 Series cable ties or Wide Strap Cable Ties to provide stability when securing bundles. Acrylic-based adhesive is tailored to outdoor applications, providing a wider range of operating temperatures and UV resistance compared to rubber. The Wide Strap adhesive mounting base is made of a high-impact material offering added resistance to impact, temperature, moisture, salt and petroleum products. Additionally, the modified acrylic provides more options to work with lower surface energy applications. Some versions of this product feature predrilled holes to extend mounting options and security.

#### Features and Benefits

- High-heat, high-bond acrylic adhesive backing allows for cable management when mounting holes or edges are not an option.
- Extended adhesive liner is easy to remove quickly prior to installation.
- Some options contain 4-way opening allowing cable ties to be installed parallel or perpendicular to bundles.



|                                       |                                  |
|---------------------------------------|----------------------------------|
| <b>ADHESIVE</b>                       | Acrylic foam                     |
| <b>Adhesive Operating Temperature</b> | -40°F to +176°F (-40°C to +80°C) |



| PART NO.  | TYPE     | Max. Static Load lb/ft | Cable Tie Series | Length (L) in. (mm) | Width (W) in. (mm) | Height (H) in. (mm) | Color | Material    | Pkg. Qty. |  |
|-----------|----------|------------------------|------------------|---------------------|--------------------|---------------------|-------|-------------|-----------|--|
| 151-01629 | MB3A     | 0.6                    | T18 - T30        | 0.8 (19.0)          | 0.8 (19.0)         | 0.2 (4.8)           | Black | PA66HIRHSUV | 100       |  |
| 151-01630 |          | 0.6                    | T18 - T30        | 0.8 (19.0)          | 0.8 (19.0)         | 0.2 (4.8)           | Black | PA66HIRHSUV | 500       |  |
| 151-01631 | MB4A     | 1.1                    | T18 - T50        | 1.1 (28.5)          | 1.1 (28.5)         | 0.2 (5.6)           | Black | PA66HIRHSUV | 100       |  |
| 151-01632 |          | 1.1                    | T18 - T50        | 1.1 (28.5)          | 1.1 (28.5)         | 0.2 (5.6)           | Black | PA66HIRHSUV | 500       |  |
| 151-01633 | MB5A     | 2.1                    | T18 - T150       | 1.5 (37.7)          | 1.5 (37.7)         | 0.3 (7.1)           | Black | PA66HIRHSUV | 100       |  |
| 151-01634 |          | 2.1                    | T18 - T150       | 1.5 (37.7)          | 1.5 (37.7)         | 0.3 (7.1)           | Black | PA66HIRHSUV | 250       |  |
| 151-01857 | WSMB5AHB | 2.1                    | T18 - T150       | 1.5 (37.7)          | 1.5 (37.7)         | 0.3 (7.7)           | Black | PA66HIRHSUV | 100       |  |

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.

### Adhesive Mounting Bases

#### High-Bond Acrylic Adhesive Mounts


HellermannTyton Adhesive Cable Tie Mounting Bases are used with T18 through T50 Series cable ties to provide stability when securing bundles. Acrylic-based adhesive is tailored to outdoor applications, providing a wider range of operating temperatures and UV resistance compared to rubber. Additionally, the acrylic provides more options to work with lower surface energy applications. Two predrilled holes extend mounting options and security. The FlexTack option extends versatility for flat, curved or moderately angled surfaces.

#### Features and Benefits

- High-bond acrylic adhesive backing allows for cable management when mounting holes or edges are not an option.
- Extended adhesive liner is easy to remove quickly prior to installation.
- 4-way opening allows cable ties to be installed parallel or perpendicular to bundles.



|                                       |                                    |
|---------------------------------------|------------------------------------|
| <b>ADHESIVE</b>                       | Acrylic foam                       |
| <b>Adhesive Operating Temperature</b> | -31°F to +158°F (-35 °C to +70 °C) |



| PART NO.  | TYPE      | Max. Static Load lb/ft | Cable Tie Series | Length (L) in. (mm) | Width (W) in. (mm) | Height (H) in. (mm) | Color | Material | Pkg. Qty. |  |
|-----------|-----------|------------------------|------------------|---------------------|--------------------|---------------------|-------|----------|-----------|--|
| 151-01527 | FMB4APT-I | 1.1                    | T18 - T50        | 1.1 (28.0)          | 1.1 (28.0)         | 0.3 (6.3)           | Black | PA66HS   | 100       |  |
| 151-01528 |           | 1.1                    | T18 - T50        | 1.1 (28.0)          | 1.1 (28.0)         | 0.3 (6.3)           | White | PA66HS   | 100       |  |
| 151-00810 | MB4A      | 1.1                    | T18 - T50        | 1.1 (28.5)          | 1.1 (28.5)         | 0.2 (5.8)           | Black | PA66W    | 100       |  |
| 151-00646 |           | 1.1                    | T18 - T50        | 1.1 (28.5)          | 1.1 (28.5)         | 0.2 (5.8)           | Black | PA66W    | 500       |  |

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.



# Bundling and Securing

## Cable Tie Mounts

### Adhesive Mounting Bases

#### Acrylic Adhesive Mounts


HellermannTyton Adhesive Cable Tie Mounting Bases are used with T18 through T150 Series cable ties to provide stability when securing bundles. Acrylic-based adhesive is tailored to outdoor applications, providing a wider range of operating temperatures and UV resistance compared to rubber. Two predrilled holes extend mounting options and security.

#### Features and Benefits

- High-bond acrylic adhesive backing allows for cable management when mounting holes or edges are not an option.
- Available in multiple sizes to accommodate varying static load weights.
- Extended adhesive liner is easy to remove quickly prior to installation.
- 4-way opening allows cable ties to be installed parallel or perpendicular to bundles.



|                                       |                                    |
|---------------------------------------|------------------------------------|
| <b>ADHESIVE</b>                       | Acrylic foam                       |
| <b>Adhesive Operating Temperature</b> | -31°F to +158°F (-35 °C to +70 °C) |



| PART NO.   | TYPE | Max. Static Load lb/ft | Cable Tie Series | Length (L) in. (mm) | Width (W) in. (mm) | Height (H) in. (mm) | Color | Material | Pkg. Qty. |  |
|------------|------|------------------------|------------------|---------------------|--------------------|---------------------|-------|----------|-----------|--|
| MB3A0A2H4  | MB3A | 0.6                    | T18 - T30        | 0.8 (19.0)          | 0.8 (19.0)         | 0.2 (4.8)           | Black | PA66     | 500       |  |
| MB3A10A2C2 |      | 0.6                    | T18 - T30        | 0.8 (19.0)          | 0.8 (19.0)         | 0.2 (4.8)           | White | PA66     | 100       |  |
| MB3A10A2H4 |      | 0.6                    | T18 - T30        | 0.8 (19.0)          | 0.8 (19.0)         | 0.2 (4.8)           | White | PA66     | 500       |  |
| MB4A0A2H4  | MB4A | 1.1                    | T18 - T50        | 1.1 (28.5)          | 1.1 (28.5)         | 0.2 (5.8)           | Black | PA66     | 500       |  |
| MB4A10A2C2 |      | 1.1                    | T18 - T50        | 1.1 (28.5)          | 1.1 (28.5)         | 0.2 (5.8)           | White | PA66     | 100       |  |
| MB4A10A2H4 |      | 1.1                    | T18 - T50        | 1.1 (28.5)          | 1.1 (28.5)         | 0.2 (5.8)           | White | PA66     | 500       |  |
| MB5A10A2F4 | MB5A | 2.1                    | T18 - T150       | 1.5 (37.7)          | 1.5 (37.7)         | 0.3 (7.1)           | White | PA66     | 250       |  |

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.



### Adhesive Mounting Bases

#### Rubber Adhesive Mounts


HellermannTyton Adhesive Cable Tie Mounting Bases are used with T18 through T150 Series cable ties to provide stability when securing bundles. Rubber-based adhesive is an economical choice ideal for indoor applications. Rubber adhesives allow for less dwell time during application in comparison to acrylic adhesives. Predrilled hole or holes extend mounting options and security.

#### Features and Benefits

- Rubber adhesive backing allows for cable management when mounting holes or edges are not an option.
- Available in multiple sizes to accommodate varying static load weights.
- Extended adhesive liner is easy to remove quickly prior to installation.



|                                       |   |
|---------------------------------------|---|
| <b>ADHESIVE</b>                       | Synthetic rubber with base of polyethylene foam |
| <b>Adhesive Operating Temperature</b> | 0°F to +150°F (-18 °C to +66 °C)                |



| PART NO.   | TYPE   | Max. Static Load lb/ft | Cable Tie Series | Length (L)<br>in. (mm) | Width (W)<br>in. (mm) | Height (H)<br>in. (mm) | Color | Material | Pkg. Qty. |  |
|------------|--------|------------------------|------------------|------------------------|-----------------------|------------------------|-------|----------|-----------|--|
| MB2.5A0C2  | MB2.5A | 0.3                    | T18              | 0.6 (15.9)             | 0.6 (15.9)            | 0.2 (4.1)              | Black | PA66     | 100       |  |
| MB2.5A0M4  |        | 0.3                    | T18              | 0.6 (15.9)             | 0.6 (15.9)            | 0.2 (4.1)              | Black | PA66     | 1000      |  |
| MB2.5A10C2 |        | 0.3                    | T18              | 0.6 (15.9)             | 0.6 (15.9)            | 0.2 (4.1)              | White | PA66     | 100       |  |
| MB2.5A10M4 |        | 0.3                    | T18              | 0.6 (15.9)             | 0.6 (15.9)            | 0.2 (4.1)              | White | PA66     | 1000      |  |
| MB3A0C2    | MB3A   | 0.6                    | T18 - T30        | 0.8 (19.0)             | 0.8 (19.0)            | 0.2 (4.6)              | Black | PA66     | 100       |  |
| MB3A0M4    |        | 0.6                    | T18 - T30        | 0.8 (19.0)             | 0.8 (19.0)            | 0.2 (4.6)              | Black | PA66     | 1000      |  |
| MB3A10C2   |        | 0.6                    | T18 - T30        | 0.8 (19.0)             | 0.8 (19.0)            | 0.2 (4.6)              | White | PA66     | 100       |  |
| MB3A10M4   |        | 0.6                    | T18 - T30        | 0.8 (19.0)             | 0.8 (19.0)            | 0.2 (4.6)              | White | PA66     | 1000      |  |
| MB4A0C2    | MB4A   | 1.1                    | T18 - T50        | 1.1 (28.5)             | 1.1 (28.5)            | 0.2 (5.6)              | Black | PA66     | 100       |  |
| MB4A0H4    |        | 1.1                    | T18 - T50        | 1.1 (28.5)             | 1.1 (28.5)            | 0.2 (5.6)              | Black | PA66     | 500       |  |
| MB4A10C2   |        | 1.1                    | T18 - T50        | 1.1 (28.5)             | 1.1 (28.5)            | 0.2 (5.6)              | White | PA66     | 100       |  |
| MB4A10H4   |        | 1.1                    | T18 - T50        | 1.1 (28.5)             | 1.1 (28.5)            | 0.2 (5.6)              | White | PA66     | 500       |  |



Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.

# Bundling and Securing

## Cable Tie Mounts

### Adhesive Mounting Bases

#### Rubber Adhesive Mounts

| PART NO.   | TYPE   | Max. Static Load lb/ft | Cable Tie Series | Length (L)<br>in. (mm) | Width (W)<br>in. (mm) | Height (H)<br>in. (mm) | Color | Material | Pkg. Qty. |   |
|------------|--------|------------------------|------------------|------------------------|-----------------------|------------------------|-------|----------|-----------|---|
| MB4SHA0C2  | MB4SHA | 1.1                    | T18 - T50        | 1.1 (28.3)             | 1.1 (28.3)            | 0.2 (5.8)              | Black | PA66     | 100       |  |
| MB4SHA0H4  |        | 1.1                    | T18 - T50        | 1.1 (28.3)             | 1.1 (28.3)            | 0.2 (5.8)              | Black | PA66     | 500       |   |
| MB4SHA10C2 |        | 1.1                    | T18 - T50        | 1.1 (28.3)             | 1.1 (28.3)            | 0.2 (5.8)              | White | PA66     | 100       |   |
| MB4SHA10H4 |        | 1.1                    | T18 - T50        | 1.1 (28.3)             | 1.1 (28.3)            | 0.2 (5.8)              | White | PA66     | 500       |   |
| MB5A0C2    | MB5A   | 2.1                    | T18 - T150       | 1.5 (37.7)             | 1.5 (37.7)            | 0.3 (7.1)              | Black | PA66     | 100       |  |
| MB5A0F4    |        | 2.1                    | T18 - T150       | 1.5 (37.7)             | 1.5 (37.7)            | 0.3 (7.1)              | Black | PA66     | 250       |   |
| MB5A10C2   |        | 2.1                    | T18 - T150       | 1.5 (37.7)             | 1.5 (37.7)            | 0.3 (7.1)              | White | PA66     | 100       |   |
| MB5A10F4   |        | 2.1                    | T18 - T150       | 1.5 (37.7)             | 1.5 (37.7)            | 0.3 (7.1)              | White | PA66     | 250       |   |

*Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.*

### Surface Preparation and Application:

For best adhesive performance, follow surface preparation below.


*\*Bond strength will increase over time.*




**1.** Mounting surface must be thoroughly cleaned prior to applying adhesive pad. Use a 50/50 mix of isopropanol and water for best results, as commercial cleaners may leave residue.




**2.** Allow surface to completely dry before proceeding to next step.



**3.** Taking care not to touch adhesive, peel off protective backing.



**4.** Press your thumb firmly against the mount with 15 lb of pressure for several seconds.




**5.** Wait several hours to allow the adhesive to fully bond with the surface.


### Storage Guidelines:

HellermannTyton products are designed for longevity and performance in a wide range of applications. When possible, products should be stored in their sealed bags in a temperature and humidity-controlled environment until use. Protect the products from long-term exposure to direct sunlight and away from direct heat sources. Ideal storage conditions are 73°F (22.8°C) and 50% relative humidity. Once opened, use product as soon as possible.

**Ideal storage conditions:**



73°F



50% relative humidity

### Shelf Life:

Adhesive mount products are recommended to be used within 24 months of purchase. HellermannTyton recommends testing products in the intended applications before final usage to verify proper functionality.



**HellermannTyton North American  
Corporate Headquarters**

7930 N. Faulkner Rd, PO Box 245017  
Milwaukee, WI 53224-9517  
Phone: (414) 355-1130, (800) 537-1512  
Fax: (414) 355-7341, (800) 848-9866  
email: corp@htamericas.com  
www.hellermann.tyton.com

***IATF 16949, AS9100, ISO 9001 and ISO14001 certified***

**HellermannTyton Canada**

Unit #4, 205 Industrial Parkway North  
Aurora, Ontario L4G 4C4 Canada  
Phone: (800) 661-2461  
Fax: (800) 390-3904  
email: sales@hellermanntyton.ca

**HellermannTyton Mexico**

Anillo Periferico Sur 7980 Edificio 6A  
Parque Industrial Tecnologico II  
Santa Maria Tequepexpan  
Tlaquepaque, Jalisco, Mexico 45601  
Phone: 011-52-33-3-133-9880  
Fax: 011-52-33-3-133-9861  
email: info@htamericas.com.mx

***ISO 9001 certified***